

# Internal Gear Pump Application Data Sheet



Name \_\_\_\_\_ Date \_\_\_\_\_  
 Company \_\_\_\_\_ Phone \_\_\_\_\_  
 Address \_\_\_\_\_ Fax \_\_\_\_\_  
 City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_ Email \_\_\_\_\_

Equipment # \_\_\_\_\_

Project # \_\_\_\_\_

### LIQUID PROPERTIES

Liquid \_\_\_\_\_  
 \*Fluid Temp. (F) \_\_\_\_\_ Max \_\_\_\_\_ Min \_\_\_\_\_  
 \*Viscosity (SSU) @ Normal Temp. \_\_\_\_\_  
 at Maximum Temp. \_\_\_\_\_ at Minimum Temp. \_\_\_\_\_  
 Specific Gravity \_\_\_\_\_  
 Vapor pressure (psi) \_\_\_\_\_ pH \_\_\_\_\_  
 \*Solids (%) \_\_\_\_\_ Max Size (in) \_\_\_\_\_ Avg. Size (in) \_\_\_\_\_  
 Abrasiveness: Low (lime slurry) Medium High (gravel)  
 Other \_\_\_\_\_

### SYSTEM

\*Design Conditions \_\_\_\_\_ GPM @ \_\_\_\_\_ psi (discharge)  
 Max. Conditions \_\_\_\_\_ GPM @ \_\_\_\_\_ psi  
 Min. Conditions \_\_\_\_\_ GPM @ \_\_\_\_\_ psi  
 NPSHa \_\_\_\_\_ ft \*Suction Pressure \_\_\_\_\_ psi  
 Lubricating Fluid: Yes \_\_\_\_\_ No \_\_\_\_\_  
 Min. Static Suction Head (for flooded suction installation) \_\_\_\_\_ ft  
 Max. Static Suction Lift (for suction lift installation) \_\_\_\_\_ ft  
 Suction Pipe Submergence \_\_\_\_\_ ft  
 Duty: 24/7 8 hrs Intermittent  
 Other \_\_\_\_\_

### MOTOR REQUIREMENTS

Enclosure: TEFC Washdown  
 Exp Proof: Class \_\_\_\_\_ Div \_\_\_\_\_ Group \_\_\_\_\_  
 Drive Type: Direct Drive VFD Integral Gear Belt(s)  
 Pump Shaft Speed: \_\_\_\_\_ RPM Motor Speed: \_\_\_\_\_ RPM  
 \_\_\_\_\_ HP \_\_\_\_\_ Voltage Phase/Hz \_\_\_\_\_ / \_\_\_\_\_  
 Other \_\_\_\_\_

### MOUNTING/BASEPLATE

Baseplate: Fabricated Channel  
 Coupling: Spacer  
 Other \_\_\_\_\_

### EXISTING PUMP DATA

Mfg and Model \_\_\_\_\_  
 Size \_\_\_\_\_ Reason for Replacement \_\_\_\_\_  
 Ports: Tapped Flanged Port Size \_\_\_\_\_ (in)  
 Other/Additional Comments \_\_\_\_\_

### Internal (Safety) Relief Valve

Internal (Safety) Relief Valve: Yes No  
 Head Type (If no valve): Valve Type with Port Covers  
 Plain Type - no Ports for Valve  
 Pressure Setting: Standard Other  
 Specify Set Pressure \_\_\_\_\_  
 (Note: Set pressure is when poppet becomes fully open)

\*Required items for quote

### SEALING OPTIONS


Packing  
 Mechanical Seal  
 Carbon Ni-Resist Buna  
 Carbon Ni-Resist FKM  
 Carbon Ni-Resist PTFE  
 Seal Location: (Mechanical Seal only)  
 1: In Stuffing Box 2: Behind the Rotor

### MATERIAL OF CONSTRUCTION

External Components: C: Cast Iron D: Ductile Iron  
 W: Cast Steel S: Stainless Steel  
 (Material selection has predefined internal materials, see corresponding manual)  
 Bushing Materials: C: Carbon Graphite B: Bronze  
 O-Rings: Buna FKM

### Configuration

Rotation: Clockwise (standard) Anti-Clockwise  
 (As viewed from drive end of pump)  
 Casing Orientation (if Applicable): (As viewed from wet end)

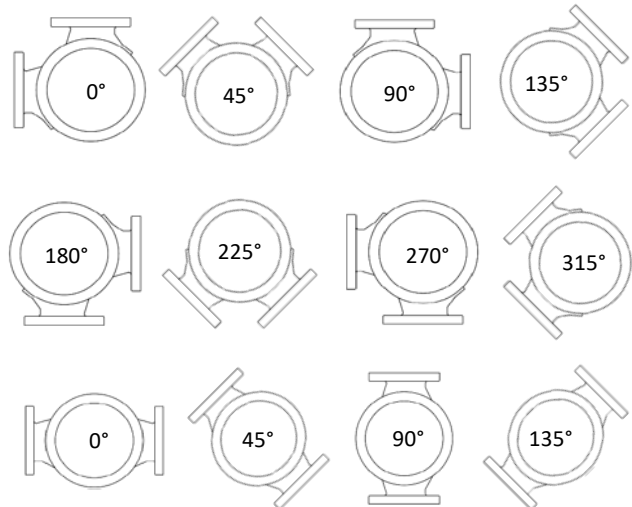

### Trims and Extra End Clearances

If applicable, do you need Summit Pump to add extra clearances to the rotor and idler due to high viscosity and/or temperature?  
 Yes No Unknown  
 If applicable, do you need Summit Pump to add extra end clearance, due to high viscosity and/or temperature?  
 Yes No Unknown  
 Per request, specify custom clearances (if desired). \_\_\_\_\_

# Internal Gear Pump Application Data Sheet

Name \_\_\_\_\_ Date \_\_\_\_\_  
Company \_\_\_\_\_ Phone \_\_\_\_\_  
Address \_\_\_\_\_ Fax \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_ Email \_\_\_\_\_



Equipment # \_\_\_\_\_ Project # \_\_\_\_\_

## SYSTEM/PUMP SKETCH